

SAUDI ARABIA • BAHRAIN

Marine damage control. Product by product.

Miko Marine equipment for Saudi Arabia and Bahrain. Represented by Aarkoss, part of Aarksee Group.

Choose the right equipment for the situation.


From the first leak response to specialist salvage, this catalogue introduces every product in the supplied Miko Marine naval range. Aarkoss is the regional enquiry point; Miko Marine AS is the manufacturer.



Diver-assisted hull repair



Magnetic hull patch

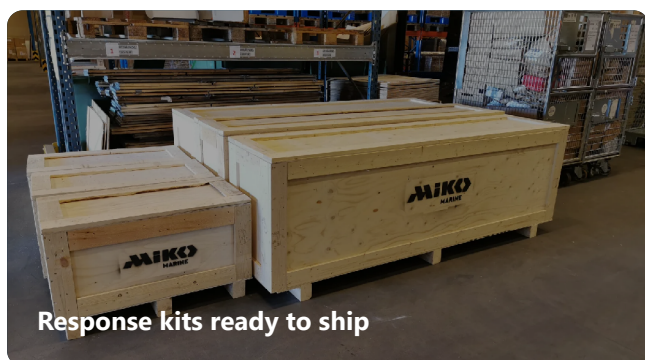

Response kits ready to ship



Underwater anchor magnet

Damage control	03
Underwater blanking	06
Marine salvage	07
Specialist sealing	02
Underwater magnets	11

PRODUCT DETAILS

Damage control

Onboard equipment for rapid control of water ingress.



Miko Salvage Bag ↗

A portable damage-control kit for water ingress through damaged hull, deck, bulkhead, openings and pipelines.

Inflatable reinforced bags in several shapes conform to the damaged opening as they are pressurised. The kit includes an air supply and handling accessories for damage-control parties.

Miko catalogue page 41

Watch demonstration ↗



Miko Hatch Sealer Bag ↗

An inflatable bag for rapidly sealing damaged or open hatches, trunks and manholes.

The reinforced bag can conform around hoses and cables passing through an opening. Handles, friction bands, an air valve, a relief valve and a marker light support deployment.

Miko catalogue page 42

PRODUCT DETAILS

Damage control

Onboard equipment for rapid control of water ingress.



Miko Pipeline Sealing Bag

A compact inflatable bag for broken pipelines, pipe openings and small ruptures.

Reinforced bags are inserted into a pipe or opening and inflated to conform to the internal shape. The catalogue describes 4 cm and 7 cm diameter options with air valve, friction band and marker light.

Miko catalogue page 43

Images and descriptions are adapted from the supplied Miko Marine product catalogue (2025). Technical limits, configurations and availability require confirmation against current manufacturer documents. Magnet holding forces quoted in this brochure are nominal perpendicular values under the catalogue's stated test conditions, not general working loads. This is not an installation guide.

Underwater blanking

Seal hull openings, sea chests and pipe inlets while afloat.



Emergency Response Bag [↗](#)

A hand-carried kit for quick in-water blanking of cracks and small openings.

Magnetic Miko Plaster patches are applied by a diver; water pressure and magnetic adhesion contribute to the seal. The kit also includes anchor and permanent magnets plus handling tools.

[Miko catalogue page 3](#)



Tanker Kit [↗](#)

A larger patch kit for afloat blanking of sea chests and water inlets or outlets.

Magnetic plasters are stored on a drum for diver-assisted positioning and roll-out. Anchor and permanent magnets provide supplementary fixing around the opening.

[Miko catalogue page 5](#)

Underwater blanking

Seal hull openings, sea chests and pipe inlets while afloat.




Magnetic Miko Plaster [↗](#)

A flexible magnetic patch for temporary sealing of leaks and hull openings on steel surfaces.

The patch combines a durable outer cover with magnetic nitrile rubber on the contact side. It is available in standard and custom shapes; large versions may include buoyancy material for handling.

Miko catalogue page 7

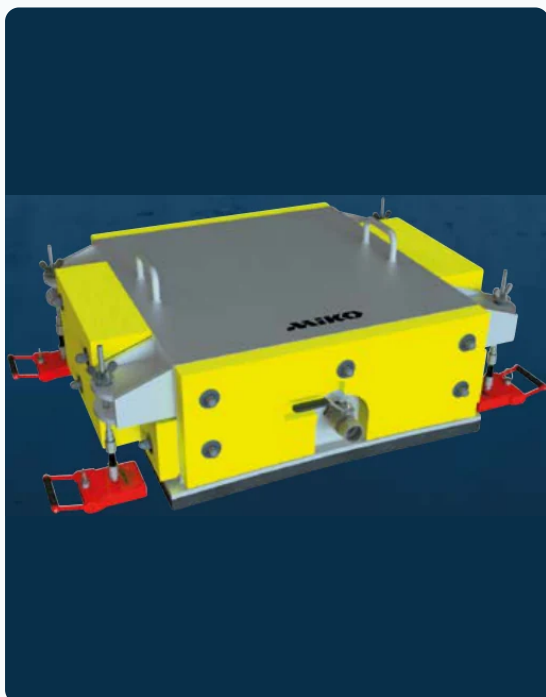

Sea Chest Cofferdams [↗](#)


Custom cofferdams for sea chests, hull apertures and pipe inlets or outlets below the waterline.

Buoyancy helps diver or ROV handling. Anchor magnets hold the cofferdam in place while a gasket forms the initial seal; the pressure difference strengthens the seal after dewatering.

Miko catalogue page 8

Underwater blanking

Seal hull openings, sea chests and pipe inlets while afloat.

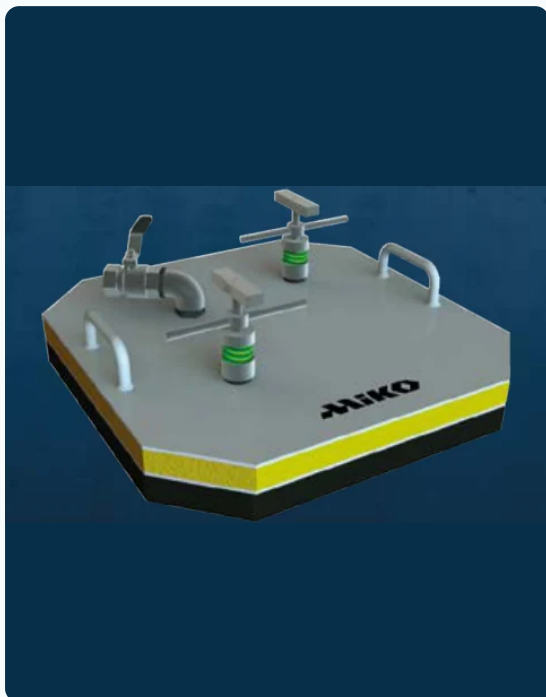

Sea Chest Covers [↗](#)

Vessel-specific covers for isolating sea chests during underwater repair or maintenance.

The cover locks onto the sea-chest grid with threaded rods. A rubber gasket seals against the hull, while springs help maintain tension after the sea chest is pumped dry.

Miko catalogue page 9



WRV-8000 Pipe Plugs [↗](#)

Expansion plugs for sealing pipe openings below the water surface.

Turning the handle compresses rubber rings against the pipe wall to form a seal. Standard sizes cover a broad range of pipe diameters; selection requires a clean, unobstructed internal surface.

Miko catalogue page 10

Marine salvage

Temporary hull repair and specialist response tools.




Miko Polar Kit [↗](#)

A hull-patching kit developed for potential ice damage in polar waters.

It combines magnetic patches with handling and installation tools intended to support subsea placement without divers or ROVs where conditions allow. The method depends on the damage and hull shape.

Miko catalogue page 12

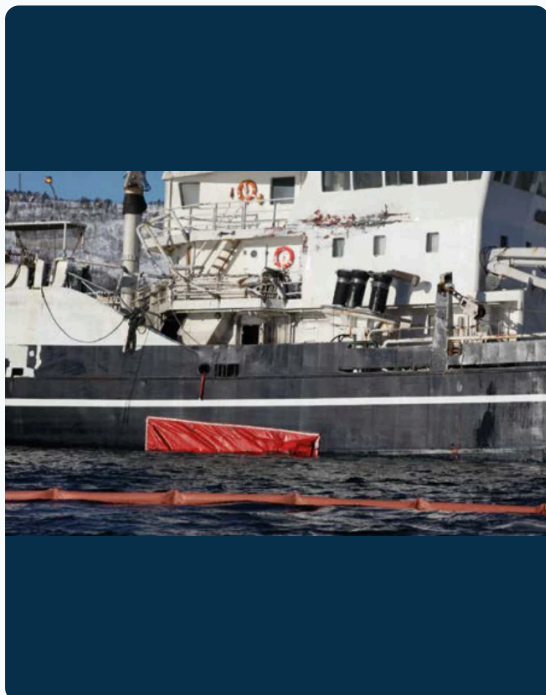

Salvage Kit [↗](#)

A temporary hull-repair kit for damage caused by grounding or collision.


FlexiShape patches are designed to follow uneven, damaged steel surfaces. Underwater fastening tools, profiles and magnets help secure the patch before towing or further repair.

Miko catalogue page 14

PRODUCT DETAILS

Marine salvage

Temporary hull repair and specialist response tools.

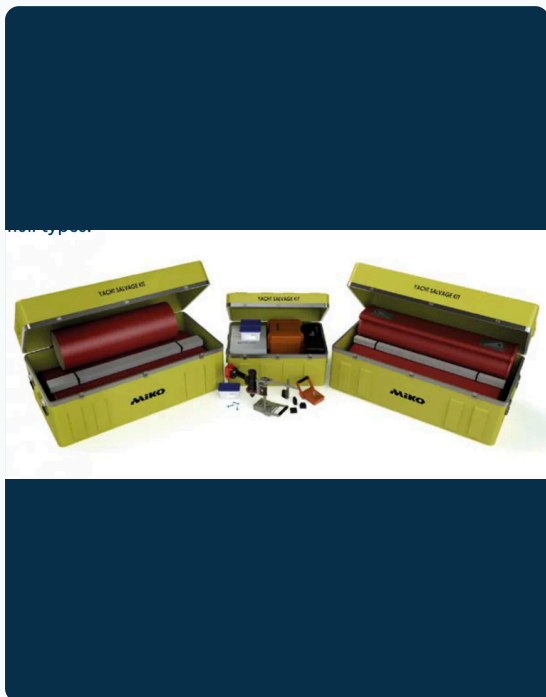

Yacht Salvage Kit [↗](#)

A packaged response kit for superyachts and smaller vessels after hull damage.

The kit combines FlexiShape and Magnetic Miko Plaster options with MikoFix and handling accessories, allowing selection of a patch according to the damage and hull material.

Miko catalogue page 16



FlexiShape Miko Plaster [↗](#)

A flexible patch for temporary repair of irregular hull damage.

An aramid inner layer helps protect against sharp edges, while rubber strips assist sealing along the patch edges. MikoFix fasteners secure it to the hull, including non-magnetic hull types.

Miko catalogue page 18

Marine salvage

Temporary hull repair and specialist response tools.




MikoFix

A cordless underwater drilling and fastening system.

The battery-powered tool fixes FlexiShape patches and can support other subsea fastening tasks where hydraulic or pneumatic tooling would otherwise be used.

Miko catalogue page 19

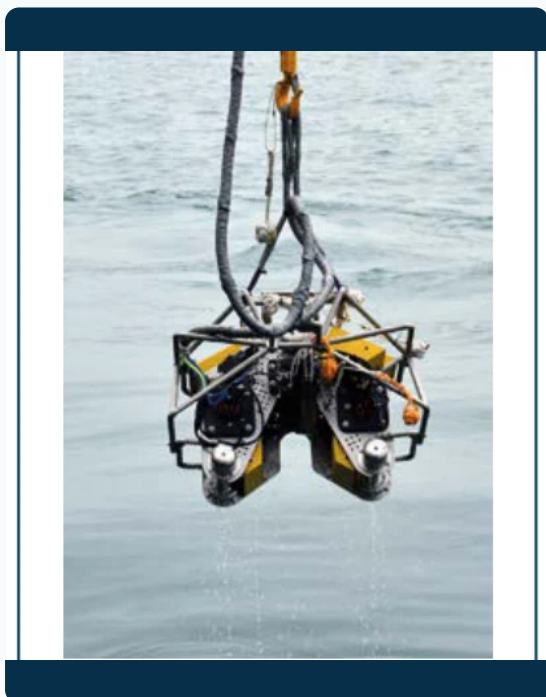

Moskito

A remotely operated tool for recovering oil from sunken or damaged vessels.

A magnetic tripod positions the electric hot-tap unit on flat or curved steel. It secures to the hull, drills access holes and mounts valve and hose connections under surface control.

Miko catalogue page 23

Marine salvage

Temporary hull repair and specialist response tools.



ShipArrestor ↗

A system for gaining initial control of a drifting vessel.

A helicopter deploys a lasso, towline and para sea anchor to turn the bow into the wind and reduce drift. The arrangement also provides a pickup line for the arriving tug.

Miko catalogue page 25

Watch demonstration ↗

Images and descriptions are adapted from the supplied Miko Marine product catalogue (2025). Technical limits, configurations and availability require confirmation against current manufacturer documents. Magnet holding forces quoted in this brochure are nominal perpendicular values under the catalogue's stated test conditions, not general working loads. This is not an installation guide.

PRODUCT DETAILS

Specialist sealing

Rapid first barriers for pipes and tanks.



Pipe Sealer Kit ↗

A rapidly deployed first barrier for leaks in pipes.

Four rubber ratchet straps of different widths and lengths cover a range of pipe sizes. The rubber pad is positioned over the leak, then tightened using the ratchet.

Miko catalogue page 27

Watch demonstration ↗



Tank Sealer Kit ↗

A flexible first barrier for leaks in steel storage tanks.

Neoprene-centred magnetic patches adhere to the tank surface; anchor magnets compress the patch over the damage. The kit can be used above or below the waterline where appropriate.

Miko catalogue page 28

Watch demonstration ↗

PRODUCT DETAILS

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.



MAM-00X Anchor Magnet [↗](#)

The highest-capacity anchor magnet in the supplied catalogue.

Intended for heavy temporary attachment such as booms, large fenders or mooring lines on steel structures. The catalogue lists 2,000 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 30



MAM-001 Anchor Magnet [↗](#)

A portable underwater fixing point for tools, guide wires and diver equipment.

The magnet has a mooring lug and release lever. The catalogue lists 150 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 31

PRODUCT DETAILS

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.



MAM-003 Anchor Magnet [↗](#)

A stronger anchor point for heavier diving equipment and temporary attachments.

A mooring lug and release lever support handling on steel surfaces. The catalogue lists 450 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 32



MAM-003S Anchor Magnet [↗](#)

A stainless-steel-housed anchor magnet for longer exposure to seawater.

The enclosure improves corrosion resistance while retaining the mooring lug and release lever. The catalogue lists 500 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 33

PRODUCT DETAILS

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.




MMC-001/003 Magnet Case [🔗](#)

A protective case for MAM-001, MAM-003 and MAM-003S magnets.

The catalogue describes a watertight IP67 case with shock absorption and magnetic shielding to support handling, storage and air freight preparation.

Miko catalogue page 34

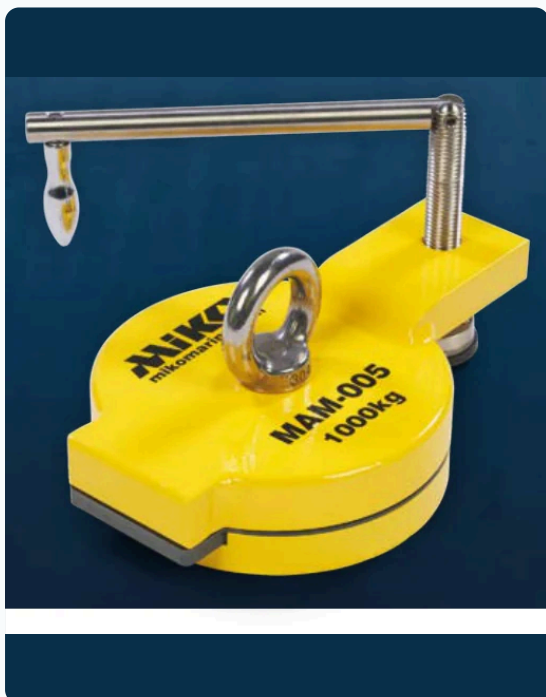

MAM-005 Anchor Magnet [🔗](#)

A heavy-duty temporary attachment for booms, fenders and mooring applications.

The magnet includes a release lever and protective shipping box. The catalogue lists 1,000 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 35

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.



MAM-Light Anchor Magnet [↗](#)

A compact magnet designed for diver handling where space and weight matter.

The catalogue lists 90 kg nominal perpendicular holding force under specified test conditions. A release lever supports controlled removal.

Miko catalogue page 36



MPHM-002 Pipe-Holding Magnet [↗](#)

A magnet shaped to attach to steel pipes and other cylindrical structures.

Used for temporary fixing of equipment or guide wires on pipes. The catalogue describes use on pipe diameters from 8 to 42 inches and lists 150 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 37

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.



MMW-001 Magnetic Wheel [↗](#)

A magnetic wheel for devices operating on steel vessels and structures.

Its hollow centre accepts a shaft for integration into inspection or other equipment. The catalogue lists 80 kg nominal perpendicular holding force under specified test conditions.

Miko catalogue page 38



MPM Permanent Magnet Series [↗](#)

Compact magnets for temporary fixing and reinforcing magnetic patches.

Each magnet has a handling case with a pin lock. The catalogue lists 60 kg nominal perpendicular holding force for each magnet under specified test conditions.

Miko catalogue page 39

Underwater magnets

Temporary fixing points for divers, equipment and ROVs.



ROV Magnet [↗](#)

A switchable magnet for stabilising ROVs and mounting subsea tools.

The mechanical on/off action can be operated by a manipulator. Interchangeable handles and brackets support cameras, lights and job-specific tools; the catalogue lists 750 kg nominal holding force under specified test conditions.

Miko catalogue page 40

Images and descriptions are adapted from the supplied Miko Marine product catalogue (2025). Technical limits, configurations and availability require confirmation against current manufacturer documents. Magnet holding forces quoted in this brochure are nominal perpendicular values under the catalogue's stated test conditions, not general working loads. This is not an installation guide.

Discuss your requirement

- 01 Describe the vessel, structure and location.
- 02 Share the damage or maintenance scenario, images, dimensions and constraints.
- 03 Aarkoss coordinates current Miko information and a quotation path.

Contact Aarkoss

For Miko Marine product information, availability or a quotation in Saudi Arabia or Bahrain:

Sales: sales@aarkoss.com

Aarksee Group: info@aarksee.com

Images and descriptions are adapted from the supplied Miko Marine product catalogue (2025). Technical limits, configurations and availability require confirmation against current manufacturer documents. Magnet holding forces quoted in this brochure are nominal perpendicular values under the catalogue's stated test conditions, not general working loads. This is not an installation guide.

معدات التحكم في أضرار السفن. منتجاً بعد منتج.

معدات ميكو مارين للمملكة العربية السعودية والبحرين. تمثلها أركوس، وهي جزء من مجموعة أركسي.

اختر المعدات المناسبة للحالة.

من الاستجابة الأولى للتسرب إلى الإنقاذ المتخصص، يقدم هذا الكتالوج كل منتج في مجموعة ميكو مارين البحرية المقدمة. أركوس جهة الاستفسار الإقليمية، وميكو مارين هي الشركة المصنّعة.



رقعة مغناطيسية للبدن



إصلاح البدن بمساعدة الغواص



مغناطيس تثبت تحت الماء



مجموعات الاستجابة جاهزة للشحن

03

التحكم في الأضرار

06

العزل تحت الماء

07

الإنقاذ البحري

02

حلول الإغلاق المتخصصة

11

المغناطيسات تحت الماء

التحكم في الأضرار

معدات على متن السفينة للتحكم السريع في تسرب المياه.

Miko Salvage Bag

مجموعة محمولة للتحكم في تسرب المياه من أضرار البدن والسطح والحواجز والفتحات والأنابيب.

تتكيف أكياس مقواة قابلة للنفخ بأشكال متعددة مع الفتحة المتضررة عند ضغطها. تضم المجموعة مصدر هواء وملحقات للمناولة لفرق التحكم في الأضرار.

صفحة الكتالوج 41

شاهد العرض العملي



Miko Hatch Sealer Bag

كيس قابل للنفخ لإغلاق الفتحات والأبواب البحرية والمناهل المفتوحة أو المتضررة بسرعة.

يتكيف الكيس المقوى حول الخراطيم والكابلات العابرة للفتحة. تساعد المقابض وأشرطة الاحتكاك وصمامات الهواء والأمان وضوء التحديد في استخدامه.

صفحة الكتالوج 42



التحكم في الأضرار

معدات على متن السفينة للتحكم السريع في تسرب المياه.

Miko Pipeline Sealing Bag

كيس مدمج قابل للنفخ للأنابيب المكسورة وفتحات الأنابيب والتمزقات الصغيرة.

يوضع الكيس المقوى داخل الأنبوب أو الفتحة وينفخ ليتكيف مع شكلها الداخلي. يذكر الكتالوج خيارين بقطر ٤ و ٧ سم مع صمام هواء وشريط احتكاك وضوء تحديد.

صفحة الكتالوج 43



الصور والأوصاف مقتبسة من كتالوج منتجات ميكو مارين المقدم (٢٠٢٥). يجب تأكيد حدود التشغيل والتجهيزات والتوفر وفق أحدث وثائق الشركة المصنّعة. قيم قوة تثبيت المغناطيسات اسمية وعمودية وفق شروط الاختبار المذكورة في الكتالوج، وليست أحمال تشغيل عامة. هذا الكتالوج ليس دليلاً للتركيب.

العزل تحت الماء

عزل فتحات البدن وصناديق السحب ومداخل الأنابيب أثناء الطفو.

Emergency Response Bag

مجموعة محمولة لعزل الشقوق والفتحات الصغيرة بسرعة تحت الماء.

يضع الغواص رقع ميكو المغناطيسية، ويساعد ضغط الماء والتثبيت المغناطيسي في الإغلاق. تضم المجموعة أيضاً مغناطيسات تثبيت دائمة وأدوات مناولة.

صفحة الكتالوج 3



Tanker Kit

مجموعة رقع أكبر لعزل صناديق السحب ومداخل المياه ومخارجها أثناء طفو السفينة.

تخزن الرقع المغناطيسية على أسطوانة لتسهيل وضعها وفردتها بمساعدة الغواص. توفر مغناطيسات التثبيت والدعم تثبيتاً إضافياً حول الفتحة.

صفحة الكتالوج 5



العزل تحت الماء

عزل فتحات البدن وصناديق السحب ومداخل الأنابيب أثناء الطفو.

Magnetic Miko Plaster

رقعة مغناطيسية مرنة للإغلاق المؤقت للتسربات والفتحات في الهياكل الفولاذية.

تجمع الرقعة غطاءً خارجياً متيناً ومطاطاً مغناطيسياً ملاصقاً للهيكل. تتوفر بأشكال قياسية ومخصصة، وقد تتضمن الأحجام الكبيرة مادة طفو لتسهيل المناولة.

صفحة الكتالوج 7




Sea Chest Cofferdams

حواجز عزل مخصصة لصناديق السحب وفتحات البدن ومداخل الأنابيب أو مخارجها تحت خط الماء.

تساعد خاصية الطفو في مناولتها بالغواص أو المركبة الآلية. تثبتها المغناطيسات، وتوفر الحشية الإغلاق الأولى ثم يعززه فرق الضغط بعد سحب الماء.

صفحة الكتالوج 8

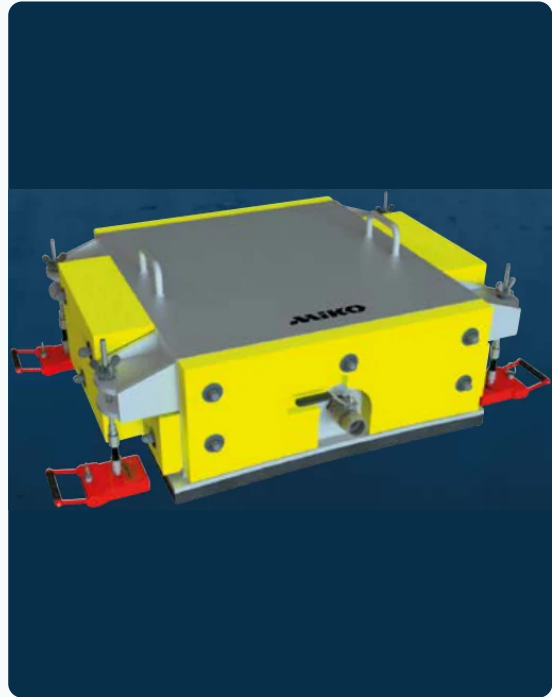

العزل تحت الماء


عزل فتحات البدن وصناديق السحب ومداخل الأنابيب أثناء الطفو.

Sea Chest Covers

أغطية تصمم للسفينة لعزل صناديق السحب أثناء الإصلاح أو الصيانة تحت الماء.

يثبت الغطاء بشبكة صندوق السحب بواسطة قضبان ملولبة. تغلق حشية مطاطية على البدن، وتساعد النوايض في المحافظة على الشد بعد سحب الماء.

صفحة الكتالوج 9

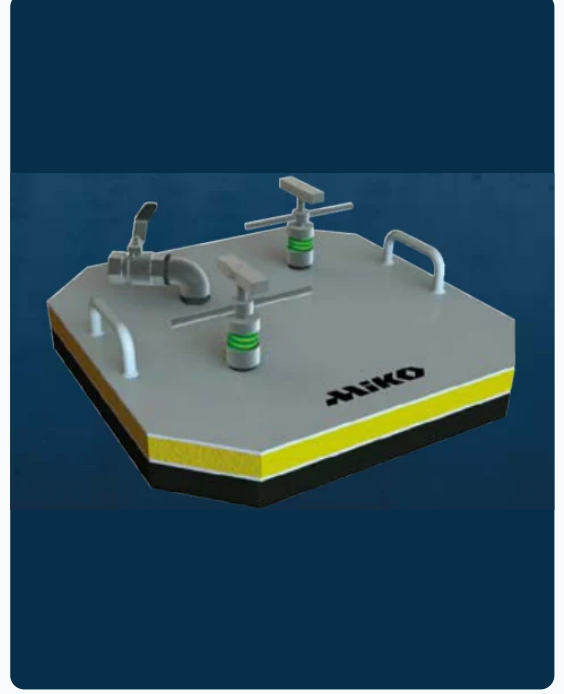

WRV-8000 Pipe Plugs

سدادات تمدد لإغلاق فتحات الأنابيب تحت سطح الماء.

يضغط تدوير المقبض حلقات المطاط على الجدار الداخلي للأنبوب لتكوين الإغلاق. تغطي الأحجام القياسية نطاقاً واسعاً من الأقطار، ويتطلب الاختيار سطحاً داخلياً نظيفاً وخالياً من العوائق.

صفحة الكتالوج 10



الإنقاذ البحري

أدوات الإصلاح المؤقت للبدن والاستجابة المتخصصة.

Miko Polar Kit

مجموعة رفع للبدن طورت للتعامل مع أضرار الجليد المحتملة في المياه القطبية.

تجمع رقعا مغناطيسية مع أدوات مناولة وتركيب صممت لدعم الوضع تحت الماء من دون غواصين أو مركبات آلية حيث تسمح الظروف. تعتمد الطريقة على الضرر وشكل البدن.

صفحة الكتالوج 12




Salvage Kit

مجموعة إصلاح مؤقت لأضرار البدن الناتجة عن الجنوح أو التصادم.

صممت رفع فليكسي شيب لتتبع الأسطح الفولاذية غير المستوية والمتضررة. تساعد أدوات التثبيت تحت الماء والملفات والمغناطيسات في تثبيت الرقعة قبل السحب أو الإصلاح اللاحق.

صفحة الكتالوج 14

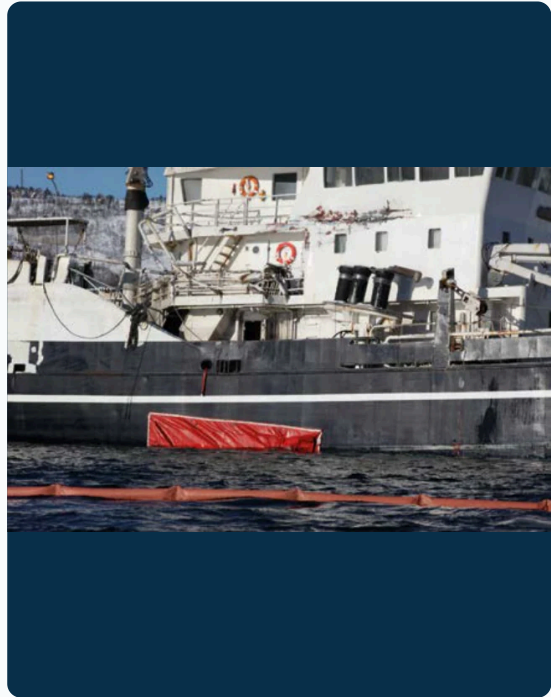

الإنقاذ البحري


أدوات الإصلاح المؤقت للبدن والاستجابة المتخصصة.

Yacht Salvage Kit

مجموعة استجابة لليخوت الكبيرة والسفن الأصغر بعد تعرض البدن للضرر.

تجمع المجموعة خيارات رقع فليكسي شيب وميكو المغناطيسية مع ميكو فيكس وملحقات المناولة، لاختيار الرقعة وفق طبيعة الضرر ومادة البدن.

صفحة الكتالوج 16

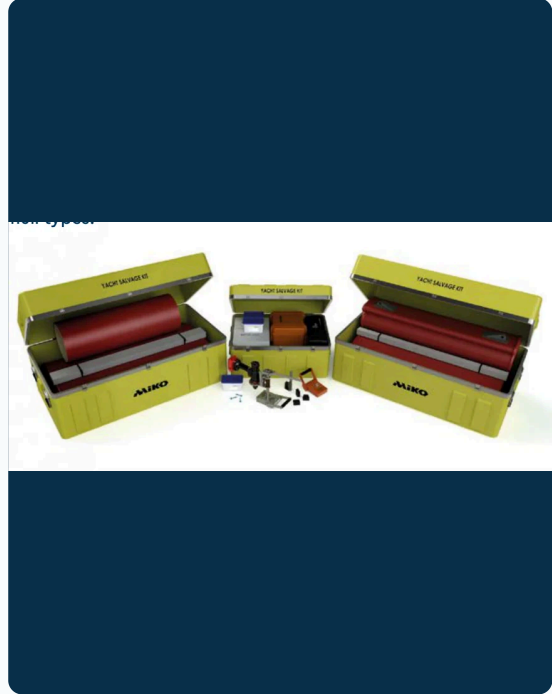

FlexiShape Miko Plaster

رقعة مرنة للإصلاح المؤقت لأضرار البدن غير المنتظمة.

تساعد طبقة داخلية من الأراميد في الحماية من الحواف الحادة، وتدعم الأشرطة المطاطية الإغلاق عند الأطراف. تثبتها أدوات ميكو فيكس على البدن، بما في ذلك الهياكل غير المغناطيسية.

صفحة الكتالوج 18



الإنقاذ البحري


أدوات الإصلاح المؤقت للبدن والاستجابة المتخصصة.

MikoFix

نظام لاسلكي للحفر والتثبيت تحت الماء.

تستخدم الأداة التي تعمل بالبطارية لتثبيت رقع فليكسي شيب، ويمكن استخدامها في أعمال تثبيت أخرى تحت الماء بدلاً من بعض الأدوات الهيدروليكية أو الهوائية.

صفحة الكتالوج 19

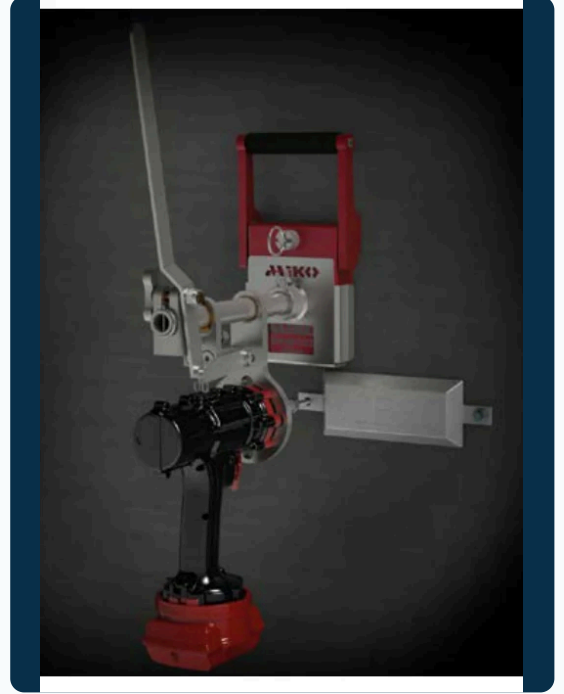


Moskito

أداة تشغل عن بُعد لاستعادة النفط من السفن الغارقة أو المتضررة.

تضع قاعدة مغناطيسية ثلاثية وحدة الثقب على الفولاذ المستوي أو المنحني. تثبت الوحدة على البدن وتحفر الفتحات وتركب وصلات الصمامات والخراطيم بتحكم من السطح.

صفحة الكتالوج 23

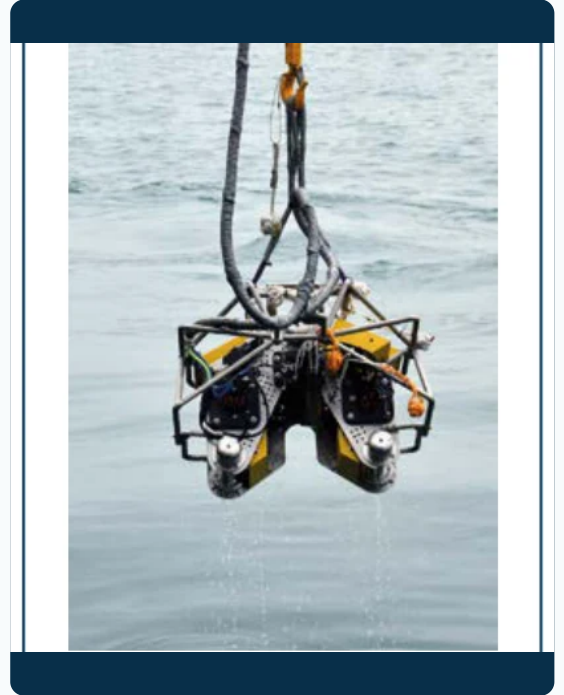

الإنقاذ البحري

أدوات الإصلاح المؤقت للبدن والاستجابة المتخصصة.

ShipArrestor ↗

نظام للسيطرة الأولية على سفينة تنجرف بلا تحكم.

تنشر مروحية حلقة تثبيت وحبل سحب ومرساة بحرية مطلية للمساعدة في توجيه المقدمة نحو الريح وتقليل الانجراف. يوفر النظام أيضاً حبل التقاط للقاطرة القادمة.

صفحة الكتالوج 25

شاهد العرض العملي ↗



الصور والأوصاف مقتبسة من كتالوج منتجات ميكو مارين المقدم (٢٠٢٥). يجب تأكيد حدود التشغيل والتجهيزات والتوفر وفق أحدث وثائق الشركة المصنّعة. قيم قوة تثبيت المغناطيسات اسمية وعمودية وفق شروط الاختبار المذكورة في الكتالوج، وليست أحمال تشغيل عامة. هذا الكتالوج ليس دليلاً للتركيب.

حلول الإغلاق المتخصصة

حواجز أولية سريعة للأنابيب والخزانات.

Pipe Sealer Kit

حاجز أولي سريع النشر للتسربات في الأنابيب.

تغطي أربعة أحزمة مطاطية بأحجام مختلفة نطاقاً من أقطار الأنابيب. توضع الوسادة المطاطية فوق التسرب ثم يشد الحزام بآلية السقطة.

صفحة الكتالوج 27

شاهد العرض العملي



Tank Sealer Kit

حاجز أولي مرن للتسربات في خزانات التخزين الفولاذية.

تلتصق رقع مغناطيسية ذات مركز من النيوبرين بسطح الخزان، وتضغط مغناطيسات التثبيت الرقعة فوق موضع الضرر. يمكن استخدامها فوق خط الماء أو تحته حيثما يناسب.

صفحة الكتالوج 28

شاهد العرض العملي



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

MAM-00X Anchor Magnet

أعلى مغناطيس تثبيت قدرة في الكتالوج المقدم.

مخصص للتثبيت المؤقت الثقيل مثل الحواجز العائمة والمصدات الكبيرة وحبال الربط على الهياكل الفولاذية. يذكر الكتالوج قوة تثبيت عمودية اسمية ٢٠٠٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 30



MAM-001 Anchor Magnet

نقطة تثبيت محمولة تحت الماء للأدوات وأسلاك التوجيه ومعدات الغواصين.

يتضمن المغناطيس حلقة ربط وذراع تحرير. يذكر الكتالوج قوة تثبيت عمودية اسمية ١٥٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 31



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

MAM-003 Anchor Magnet

نقطة تثبيت أقوى لمعدات الغوص الأثقل والملحقات المؤقتة.

تساعد حلقة الربط وذراع التحرير في مناولته على الأسطح الفولاذية. يذكر الكتالوج قوة تثبيت عمودية اسمية ٤٥٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 32



MAM-003S Anchor Magnet

مغناطيس تثبيت بغلاف من الفولاذ المقاوم للصدأ للتعرض الأطول لمياه البحر.

يعزز الغلاف مقاومة التآكل مع حلقة الربط وذراع التحرير. يذكر الكتالوج قوة تثبيت عمودية اسمية ٥٠٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 33



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

MMC-001/003 Magnet Case

حقيبة حماية لمغناطيسات MAM-001 و MAM-003 و MAM-003S.

يصف الكتالوج حقيبة مقاومة للماء بتصنيف IP67 مع امتصاص للصدمات وحجب للمجال المغناطيسي لدعم المناولة والتخزين والتحضير للشحن الجوي.

صفحة الكتالوج 34



MAM-005 Anchor Magnet

تثبيت مؤقت للأعمال الثقيلة مثل الحواجز والمصدات والربط.

يتضمن المغناطيس ذراع تحرير وصندوق شحن وإقياً. يذكر الكتالوج قوة تثبيت عمودية اسمية ١٠٠٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 35



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

MAM-Light Anchor Magnet

مغناطيس مدمج يسهل على الغواص مناولته عندما تكون المساحة والوزن مهمين.

يذكر الكتالوج قوة تثبيت عمودية اسمية ٩٠ كغ وفق شروط اختبار محددة. يساعد ذراع التحرير في إزالته بشكل متحكم به.

صفحة الكتالوج 36



MPHM-002 Pipe-Holding Magnet

مغناطيس مصمم للتثبيت على الأنابيب الفولاذية والأسطح الأسطوانية.

يستخدم لتثبيت المعدات أو أسلاك التوجيه مؤقتاً على الأنابيب. يذكر الكتالوج أقطاراً من ٨ إلى ٤٢ بوصة وقوة تثبيت عمودية اسمية ١٥٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 37



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

MMW-001 Magnetic Wheel

عجلة مغناطيسية لأجهزة تعمل على السفن والهياكل الفولاذية.

يستوعب مركزها المجوف محوراً لدمجها في معدات الفحص أو غيرها. يذكر الكتالوج قوة تثبيت عمودية اسمية ٨٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 38



MPM Permanent Magnet Series

مغناطيسات مدمجة للتثبيت المؤقت وتعزيز الرقع المغناطيسية.

لكل مغناطيس علبة مناولة بقف دبوسي. يذكر الكتالوج قوة تثبيت عمودية اسمية ٦٠ كغ لكل مغناطيس وفق شروط اختبار محددة.

صفحة الكتالوج 39



المغناطيسات تحت الماء

نقاط تثبيت مؤقتة للغواصين والمعدات والمركبات الآلية تحت الماء.

ROV Magnet

مغناطيس قابل للتشغيل والإيقاف لتثبيت المركبات الآلية وأدوات العمل تحت الماء.

يمكن لذراع المناولة تشغيله ميكانيكياً. تسمح المقابض والحاملات القابلة للاستبدال بتركيب الكاميرات والأضواء والأدوات المخصصة؛ ويذكر الكتالوج قوة تثبيت اسمية ٧٥٠ كغ وفق شروط اختبار محددة.

صفحة الكتالوج 40



الصور والأوصاف مقتبسة من كتالوج منتجات ميكو مارين المقدم (٢٠٢٥). يجب تأكيد حدود التشغيل والتجهيزات والتوفر وفق أحدث وثائق الشركة المصنّعة. قيم قوة تثبيت المغناطيسات اسمية وعمودية وفق شروط الاختبار المذكورة في الكتالوج، وليست أحمال تشغيل عامة. هذا الكتالوج ليس دليلاً للتركيب.

ناقش متطلباتك معنا

01 صف السفينة أو المنشأة وموقعها.

02 أرسل طبيعة الضرر أو أعمال الصيانة والصور والأبعاد والقيود المتاحة.

03 تنسق أركوس معلومات ميكو الحالية وخطوات عرض السعر.

تواصل مع أركوس

للمعلومات عن منتجات ميكو مارين أو توفرها أو طلب عرض سعر في السعودية أو البحرين:

المبيعات: sales@aarkoss.com

مجموعة أركسي: info@aarksee.com

الصور والأوصاف مقتبسة من كتالوج منتجات ميكو مارين المقدم (٢٠٢٥). يجب تأكيد حدود التشغيل والتجهيزات والتوفر وفق أحدث وثائق الشركة المصنعة. قيم قوة تثبيت المغناطيسات اسمية وعمودية وفق شروط الاختبار المذكورة في الكتالوج، وليست أحمال تشغيل عامة. هذا الكتالوج ليس دليلاً للتركيب.